

DPX9m 9 Camera Full Duplex B/W Multiplexer



IR Remote


DPX9m

The DPX9m incorporates new and advanced features such as high speed multiplexing, Real Time Quad Display, Camera Switch Input and more. Advanced alarm features include Multi Directional Motion Detection. Comes with IR Remote Control and the same great ATV value!


Main Features

- 9 Camera Input
- Full Looping Output
- Alarm Camera Set
- Live Roll Free Sequencing in all display modes
- Simultaneous Record / Playback Utilizing Two VCR's
- Freeze / Master Enable Input
- 9 Alarm Inputs, 1 Alarm Output
- Call Monitor Output, Sequencing
- Camera Switch Input
- Time and Date
- On Screen Menu / Advanced Menu
- Activity Detection
- Multi Directional Motion Detection
- Multi Camera Alarm Displays
- Alarmed Camera Continuous Recording Option
- 2x, 4x Zoom
- Real Time Quad Display
- Playback Other Manufacturers Tapes (Robot & DM)
- Automatic Daylight Saving Time Feature
- Serial Commands from PC
- Alarming, Custom Alarming, Video Loss Alarm
- Alarm Log, Alarm Scheduling
- Enhanced Security Lockout
- Discreet Camera Lockout (Covert Camera)
- "Customplexing" (priority camera multiplexing)
- Custom VCR Delay Table
- VCR Bypass
- DigiLock VCR Playback Stabilization
- AGC on all Inputs
- RS-232 Serial Port
- Dual Code IR Remote Control
- High Speed Multiplexing
- Alternate Language (English, Spanish, German, French)
- Selectable Text Color

DPX9m 9 Camera Full Duplex B/W Multiplexer

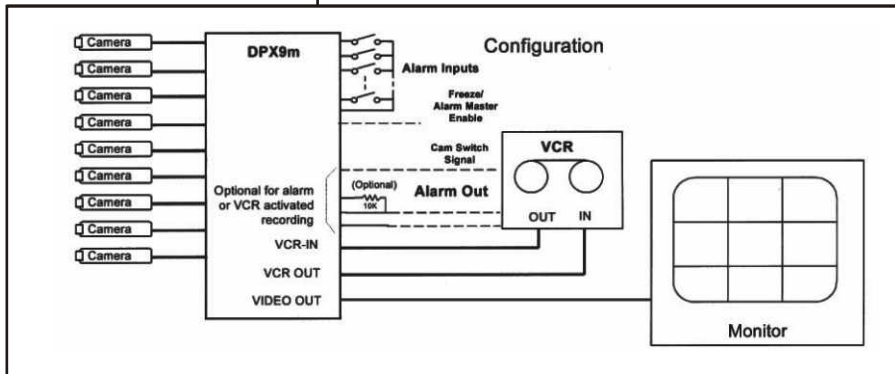

Duplex / Live Playback Modes:

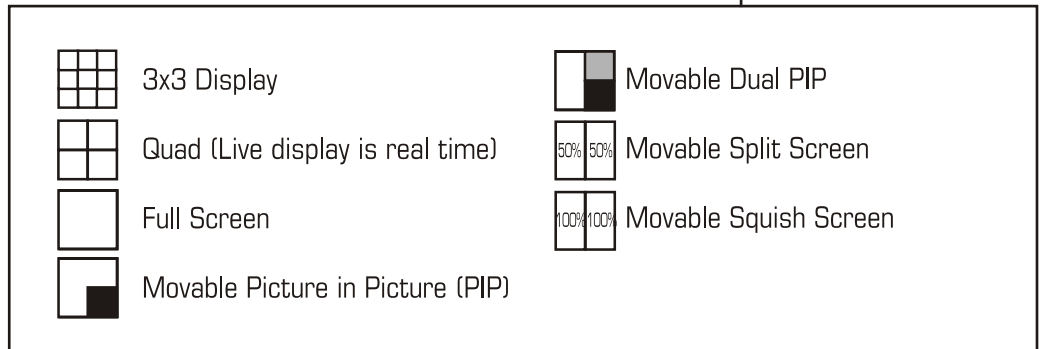

Specifications:

Video Signal Format: NTSC/EIA and PAL/CCIR Compatible
 NTSC/EIA: 525 Lines, 60 Fields per sec
 PAL/CCIR: 625 Lines, 50 Fields per sec

Resolution: 720(H) x 480(V) (NTSC/EIA)
 720(H) X 576(V) (PAL/CCIR)

Camera Inputs: 0.6 TO 1.2p-p 75 Ohm Termination

Camera Sync: No special Sync Required

Monitor Output: 1.0Vp-p into 75 Ohm Termination

VCR Output: 1.0 Vp-p into 75 Ohm Termination

Electrical

Power: 12V AC @ 2 Amp
Safety: UL Listed, CSA and CE Certified
EMI: FCC Part 15, Class A, and CE Certified

Mechanical

Dimensions: H:2.2Σ x W:16.86Σ x D:7.8Σ
 H:56.4mm x W:432mm x D: 200mm
Weight: 7.8lbs.(3.55kg),Power Supply:01.0lbs(0.45 kg)
Operating Temp: 32 °F - 104 ° (0 C°- 40 C)°

Accessories

ATV Part#:	Description:
RM - DPX9m	Infrared Remote Control
RK - DPX9m	Rack Mount Kit
PS - DPX9m	Power Supply
RCP1	Hardwire Remote
PIDM	Remote Interface